



R13-3

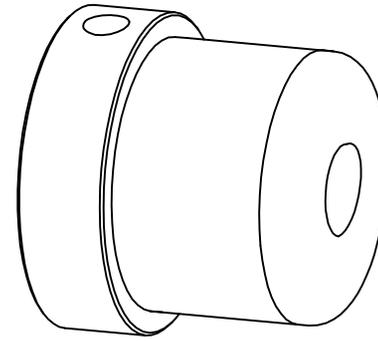

R13A-3

CORE SIZE AND TYPE: 3" through 4" core I.D. for most fiber, steel tipped, and plastic cores.
 MOUNTING METHOD: Through shaft with set screw and/or keyway if required.
 BORE TOLERANCE: +.010"

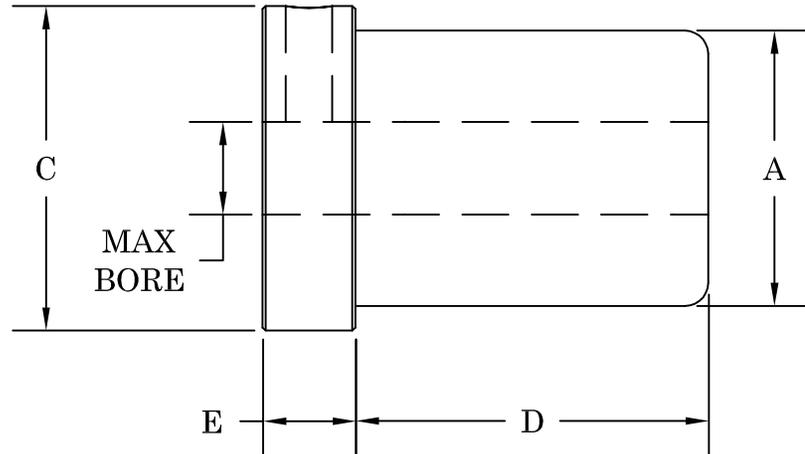

| CHUCK NUMBER | A | MAX. BORE SIZE | C | D | E |
|--------------|------|----------------|------|------|------|
| R13A-3 | 2.99 | 2.25 | 3.50 | 1.00 | 1.00 |
| R13-3 | 3.99 | 2.25 | 3.50 | 3.00 | 1.00 |
| R13-4 | 3.99 | 3.00 | 4.50 | 3.00 | 1.00 |

TILT-LOCK
 THE ROLL HANDLING PEOPLE FOR OVER 30 YEARS.

12070 43rd St NE
 St Michael, MN 55376
 Phone: 763-497-7045
 Fax: 763-497-7046
 1-800-999-8458
<http://www.tiltlock.com>