



LD1

Electric Tip Lift

Hoist mounted roll handling equipment designed to quickly and safely lift and rotate a roll.

POWER REQUIREMENTS

115 volts, 60 Hertz, single phase, 7 1/2 amps. Unit equipped with 6-conductor coiled SO Cable. 90 PSI required to power pneumatic tooth release (optional).

SPEED

Approximately 12 seconds per tip.

TIPPING RESTRICTIONS

Not to exceed 25 tips per hour.

WEIGHT

67 lbs with 3" standard probe.

CAPACITY

See chart on page 2.


PROBE

All Tip Lifts probes are interchangeable. Probes Feature a patented design that prevents a roll from being release unless the weight of the roll is supported. This prevent unintentionally releasing the roll when the operator is not ready.




Handle Mounted Controls

Handle mounted controls allow the operator to tip the roll, release the roll (if unit has pneumatic tooth release) and control the hoist while keeping hands in a safe location.

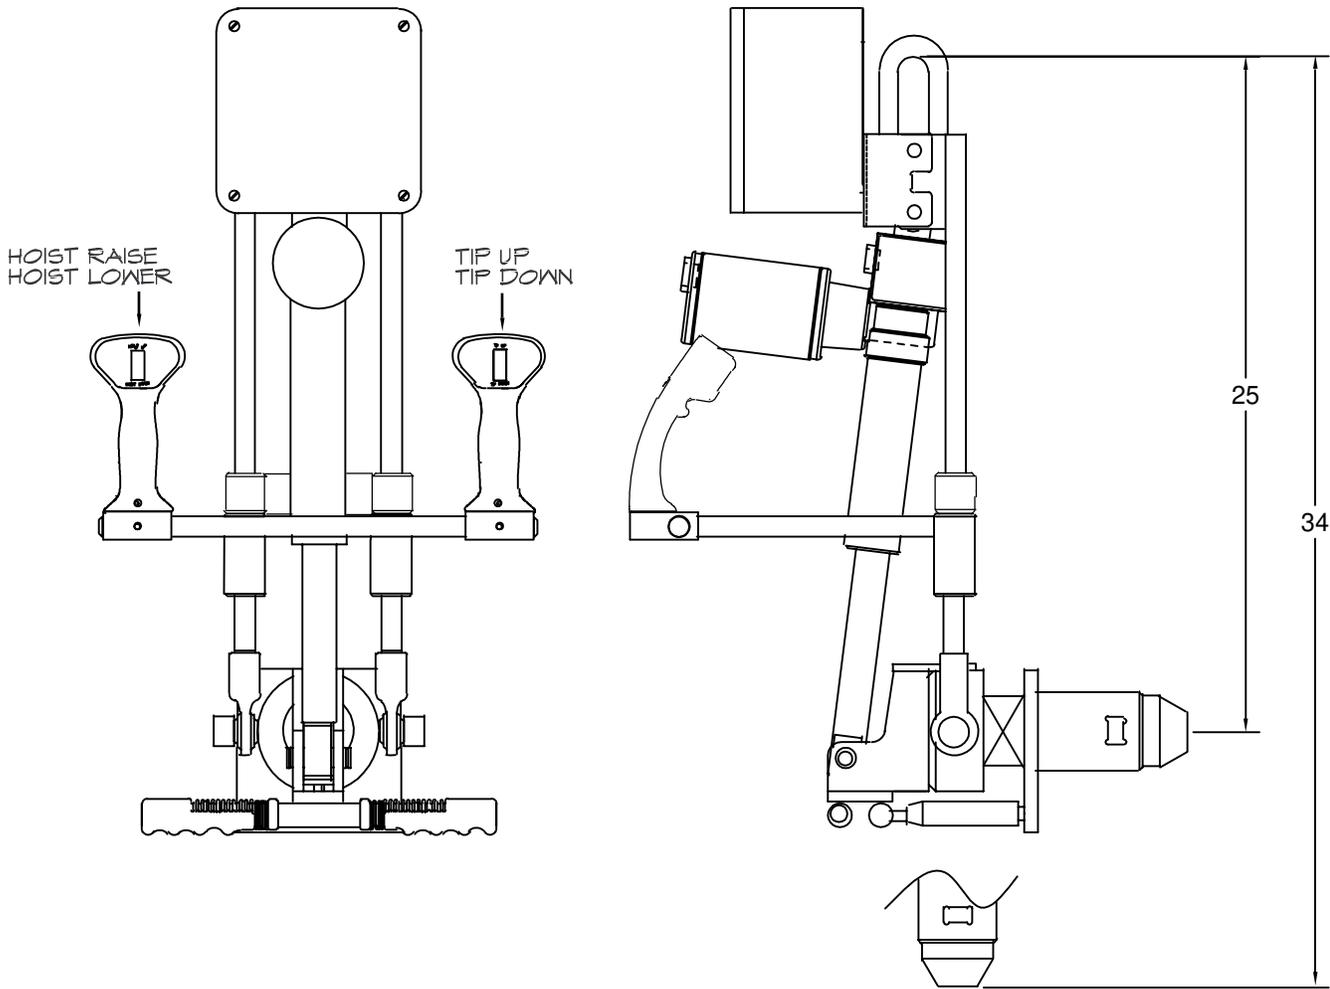

SPECS AND OPTIONS


LD1 Electric Tip Lift Capacity						
Roll Face Width	4"	8"	12"	16"	20"	24"
Max Capacity	344lbs	246lbs	191lbs	156lbs	132lbs	115lbs

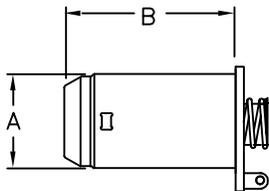

Standard Probe Options		
Type	"A"	"B"
3" Standard	2.875"	10.5"
3" Short	2.875"	6"
6" Standard	5.875"	10.5"
6" Short	5.875"	6"

Custom Probes Available Upon Request.

Manual Tooth Release

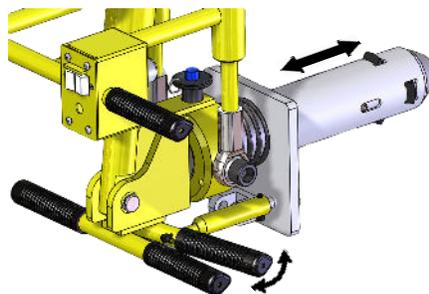

Pneumatic Tooth Release

